

ELECTRIC TELESCOPIC BOOM



	TB18EJ Plus	TB590EJ Plus	TB20EJ Plus	TB660EJ Plus	TB22EJ Plus	TB730EJ Plus
Max Working height	20.4m	66'11"	22m	72'2"	24.5m	80'5"
Max Platform Height	18.4m	60'4"	20m	65'7"	22.5 m	74'
Max Horizontal Extension (Restricted/Unrestricted)	11.7m/13.2m	38'5" /43'4"	13.85m/15.4m	45'5"/50'6"	12.7m/14.3 m	41'8"/46'11"
Platform Dimension(LxWxH)	2.44x0.91x1.1m	8'x3'x3'7"	2.44x0.91x1.1m	8'x3'x3'7"	2.44x0.91x1.1m	8'x3'x3'7"
Length Stowed	9.67m	31'8"	9.99m	32'9"	10.68m	35'
Width Stowed	2.42m	7'11"	2.49m	8'2"	2.49 m	8'2"
Height Stowed	2.56m	8'4"	2.79m	9'2"	2.81 m	9'3"
Platform Capacity (Restricted/Unrestricted)	454kg/300kg	1,000lbs/661lbs	454kg/300kg	1,000lbs/661lbs	454kg/300kg	1,000lbs/661lbs
Gradeability	35%	35%	35%	35%	35%	35%
DrivexSteer	4WD x 2WS	4WD x 2WS	4WD x 2WS	4WD x 2WS	4WD x 2WS	4WD x 2WS
Weight	9,600kg	21,164lbs	11,502kg	25,358lbs	12,260kg	27,029lbs




	TB26EJ Plus	TB860EJ Plus	TB28EJ Plus	TB910EJ Plus	TB32EJN Plus	TB1050EJN Plus
Max Working height	28.3m	92'10"	29.6m	97'1"	34.3m	112'6"
Max Platform Height	26.3m	86'3"	27.6m	90'7"	32.3m	105'12"
Max Horizontal Extension (Restricted/Unrestricted)	18.65m/20.6m	61'2"/67'7"	18.65m/20.6m	61'2"/67'7"	17.8m/19.5m	58'5"/64'
Platform Dimension(LxWxH)	2.44x0.91x1.1m	8'x3'x3'7"	2.44x0.91x1.1m	8'x3'x3'7"	2.44x0.91x1.1m	8'x3'x3'7"
Length Stowed	12.5m	41'	12.5m	41'	12.76m	41'10'
Width Stowed	2.49m	8'2"	2.49m	8'2"	2.49m	8'2"
Height Stowed	2.88m	9'5"	2.88m	9'5"	2.88m	9'5"
Platform Capacity (Restricted/Unrestricted)	454kg/300kg	1,000lbs/661lbs	454kg/300kg	1,000lbs/661lbs	454kg/300kg	1,000lbs/661lbs
Gradeability	45%	45%	45%	45%	45%	45%
DrivexSteer	4WDx2WS	4WDx2WS	4WDx2WS	4WDx2WS	4WDx2WS	4WDx2WS
Weight	18,059kg	39,813lbs	18,119kg	39,946lbs	18,370kg	40,498lbs

VERTICAL MAST LIFT



	ML10EJ	ML340EJ		ML10EJ	ML340EJ
Max Working Height	10.3m	33'10"	Height Stowed	1.99m	6'6"
Max Platform Height	8.3m	27'3"	Width Stowed	0.99m	3'3"
Platform Capacity	200kg	440lbs	Length Stowed	2.97m	9'9"
Turntable Rotation	345°	345°	Batteries	6Vx4/240Ah	6Vx4/240Ah
Vertical Jib Rotation	+70°/-50°	+70°/-50°	Drive	2WD, rear wheel	2WD, rear wheel
Gradeability	25%	25%	Weight	2,678kg	5,904lbs

SINOBOOM



© 2022 Sinoboom Intelligent Equipment. This brochure is for reference only. Specifications listed are subject to change at any time. Consult the Operating Maintenance and Parts Manuals for proper procedures. 10/2022

PRODUCT GUIDE



Sinoboom B.V.

Nikkelstraat 26
2984 AM Ridderkerk
The Netherlands


www.sinoboom.eu
info@sinoboom.eu
+ 31 180 225 666



PARTNERS IN ACCESS™

ELECTRIC SCISSOR LIFT

- MAINTENANCE FREE BATTERIES STANDARD
- INDOOR & OUTDOOR CAPABLE

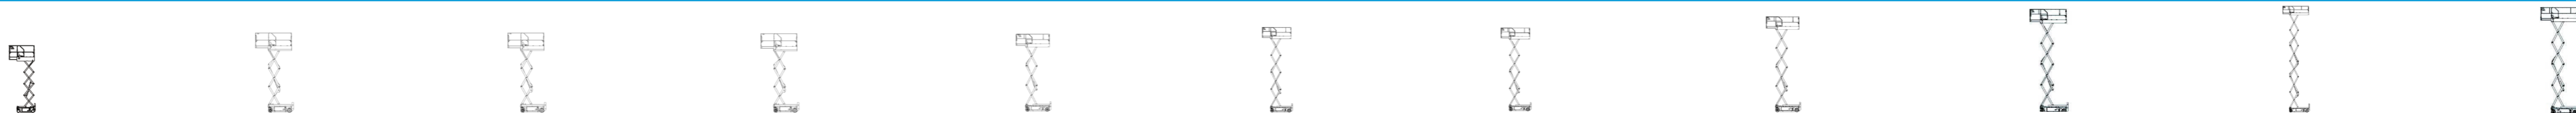

	0407SE	1530SE	0608SE	1930SE	0607SE	1932SE	0608ME	1932ME	0608E	2132E	0808E	2732E	0812E	2746E	1012E	3346E	1212E	4047E	1412E Plus	4647E Plus	1414E Plus	4655E Plus	
Working height(indoor/outdoor)	6.5m/5.8m	21'4"/19'	7.8m	25'7"	7.6m/6.6m	24'11"/21'26"	7.8m	25'7"	8.3m	27'3"	10.1m / 8m	33'2"/26'3"	10.1m	33'2"	12m	39'5"	13.9m / 11m	45'7"/36'	15.8m	51'10"	15.8m / 10.5m	51'10"/34'5"	
Platform Height(indoor/outdoor)	4.5m/3.8m	14'9"/12'6"	5.8m	19'	5.6m/4.6m	18'5"/15'	5.8m	19'	6.3m	20'8"	8.1m / 6m	26'7"/19'8"	8.1m	26'7"	10m	32'10"	11.9m / 9m	39'/29'6"	13.8m	45'3"	13.8m / 8.5m	45'3"/27'11"	
Max Horizontal Extension	0.6m	2'	0.9m	3'	0.6m	2'	0.9m	3'	0.9m	3'	0.9m	3'	0.9m	3'	0.9m	3'	0.9m	3'	0.9m	3'	0.9m	3'	3'
Platform Capacity	240kg	529lbs	230kg	507lbs	230kg	507lbs	230kg	507lbs	380kg	838lbs	250kg	551lbs	450kg	992lbs	320kg	706lbs	320kg	706lbs	350kg	772lbs	350kg	772lbs	
Length Stowed	1.42m	4'8"	1.8m	5'11"	1.52m	4'12"	1.8m	5'11"	2.46m	8'	2.46m	8'	2.45m	8'	2.45m	8'	2.45m	8'	2.78m	9'	2.78m	9'	
Width Stowed	0.76m	2'6"	0.79m	2'7"	0.81m	2'8"	0.81m	2'8"	0.83m	2'9"	0.83m	2'9"	1.17m	3'10"	1.17m	3'10"	1.17m	3'10"	1.27m	4'2"	1.41m	4'7"	
Height stowed-Rail Folded	1.67m	5'6"	1.88m	6'2"	1.77m	5'10"	1.88m	6'2"	1.84m	6'	1.96m	6'5"	1.73m	5'8"	1.86m	6'1"	1.98m	6'6"	1.96m	6'5"	1.98m	6'6"	
Height stowed-Rail Unfolded	1.97m	6'6"	2.14m	7'	2.1m	6'11"	2.14m	7'	2.24m	7'4"	2.36m	7'9"	2.36m	7'9"	2.48m	8'2"	2.6m	8'6"	2.6m	8'6"	2.6m	8'6"	
Gradeability	25%	25%	25%	25%	25%	25%	25%	25%	25%	25%	25%	25%	25%	25%	25%	25%	25%	25%	25%	0.25	20%	20%	
Weight (indoor/ outdoor)	880kg	1,941lbs	1,575kg	3,473lbs	1,210kg	2,668lbs	1,575kg	3,473lbs	2,090kg	4,608lbs	2,265kg	4,994lbs	2,715kg	5,985lbs	2,815kg	6,206lbs	3,210kg	7,077lbs	3,375kg	7,442lbs	3,660kg	8,069lbs	

ROUGH TERRAIN SCISSOR LIFT


- TERRAINABILITY
- EASY MAINTENANCE



	1018RD/1018RE	3369RD/3369RE	1218RD/1218RE	4069RD/4069RE	1323RE	4389RE	1623RE	5389RE
Working height	12m	39'4"	14.2m	46'7"	15.1m	49'6"	18.2m	59'9"
Platform Height	10m	32'10"	12.2m	40'	13.1m	43'	16.2m	53'2"
Max Horizontal Extension	1.5m	4'11"	1.5m	4'11"	1.5m	4'11"	1.5m	4'11"
Platform Capacity	450kg	992lbs	365kg	805lbs	680kg	1,499lbs	680kg	1,499lbs
Length Stowed(OUTRIGGERS)	3.77m/3.8m	12'4"/12'6"	3.77m/3.8m	12'4"/12'6"	4.88m	16'	4.88m	16'
Width Stowed	1.78m / 1.77m	5'10"	1.78m/1.77m	5'10"	2.28m	7'5"	2.28m	7'5"
Height stowed-Rail Unfolded	2.56m / 2.59m	8'5"/8'6"	2.73m/2.75m	8'11.5"/9'	2.98m	9'9"	3.21m	10'6"
Gradeability	35%	35%	35%	35%	50%	50%	40%	40%
DrivexSteer	4WDx2WS / 2WDx2WS	4WDx2WS / 2WDx2WS	4WDx2WS / 2WDx2WS	4WDx2WS / 2WDx2WS	4WDx2WS	4WDx2WS	4WDx2WS	4WDx2WS
Weight	4,110kg / 4,510kg	9,061lbs/9,943lbs	5,180kg/5,580 kg	11,420lbs/12,302 lbs	8,500kg	18,739lbs	9,250kg	20,392lbs

ELECTRIC KNUCKLE BOOM

- PROPORTIONAL CONTROL JOYSTICKS
- STABLE HYDRAULIC LEVELING

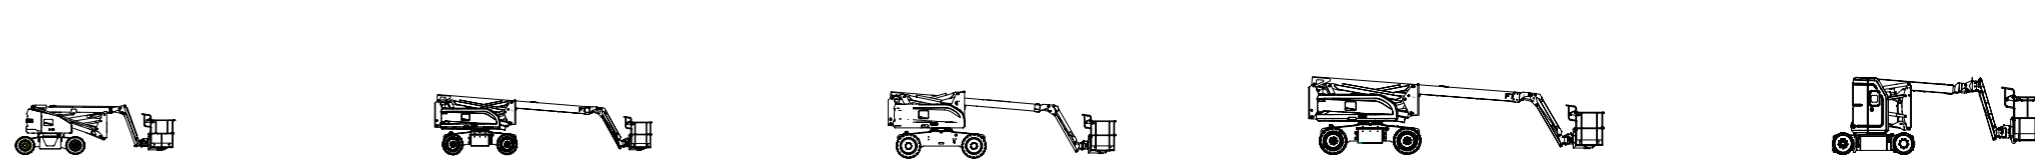

	AB14EJ	AB460EJ	AB16EJ	AB520EJ	AB18EJ	AB600EJ	AB22EJ Plus	AB710EJ PLUS	AB10ERJN	AB330ERJN
Max Working height	16m	52'6"	17.7m	58'1"	20.2m	66'3"	23.6m	77'5"	12 m	39'4"
Max Platform Height	14m	45'11"	15.7m	51'6"	18.2m	59'9"	21.6m	70'10"	9.62m	32'7"
Max Horizontal Extension	7.6m	24'11"	9.3m	30'6"	11.5m	37'9"	13.4 m/11.9m/10.45m	44'/39'/34'3"	6.3 m	20'8"
Platform Dimension(LxWxH)	1.45x0.85x1.1m	4'9"x2'9"x3'7"	1.83x0.85x1.1m	6'x2'9"x3'7"	2.44x0.91x1.1m	8'x3'x3'7"	2.44x0.91x1.1m	8'x3'x3'7"	1.15x0.76x1.1 m	45.3"x30"x43.3"
Length Stowed	6m	19'8"	6.8m	22'4"	8.7m	28'7"	9.95m	32'8"	5.6 m	18'4"
Width Stowed	1.73m	5'8"	1.9m	6'3"	2.49m	8'2"	2.49m	8'2"	1.19m	3'11"
Height Stowed	2m	6'7"	2m	6'7"	2.56m	8'5"	2.68m	8'10"	1.99m	6'6"
Platform Capacity	230kg	507lbs	230kg	507lbs	230kg	507lbs	230kg/340kg/450kg	507lbs/750lbs/1,000lbs	230kg	507lbs
Gradeability	30%	30%	30%	30%	40%	40%	40%	40%	35%	35%
Drive x Steer	2WDx2WS	2WDx2WS	2WDx2WS	2WDx2WS	4WDx2WS	4WDx2WS	4WDx2WS	4WDx2WS	2WDx2WS	2WDx2WS
Weight	7,100kg	15,653lbs	7,300kg	16,094lbs	8,300kg	18,298lbs	10,900kg	24,030lbs	6,550kg	14,440lbs



PARTS, SERVICE & SUPPORT

No matter where you are, Sinoboom is here to support the quality and reliability you expect from our products.

www.sinoboom.eu

Backed by a team with experienced industry knowledge, we understand how vital machine uptime is to you. That is why our team is made up of professionals with hands-on experience in the aerial industry.

SINOBOOM