

**MasterMover®**

# TOW2000 ES

Battery powered electric tow tug



# TOW2000 ES



## Overview

The MasterTow range of powerful, easy-to-use electric tow tugs, is ideally suited to towing heavy loads. The range uses its own weight to deliver consistent traction, enabling the effortless movement of loads both inside, outside and on slopes.

Boasting intuitive operator controls and safety built-in as standard, the range provides operators with complete control when moving heavy loads. With a simple and effective coupling system, the MasterTow

range guarantees load security and is perfectly suited to moving individual and multiple loads linked together.

Take advantage of innovative technology with Electric Steer (ES), available from the TOW600 ES upwards. With Electric Steer, benefit from instantaneous steering and added performance in adverse conditions. The MasterTow range is available with Remote Control, for maximum operator visibility, and Autonomous (AGV) solutions for maximum ROI, safety and efficiency.

## Key Features

### Safety

- Audible horn, flashing light beacon and emergency stop
- Machine crawl coupling assist for easy connection
- Multiple speed settings for complete control

### Performance

- Optimised weight distribution for guaranteed traction
- Start, move and stop movement on slopes
- Powerful performance delivers high torque even at low speeds

### Power


- Optional Battery Protection System maximises battery life
- High performance, interchangeable batteries for 24/7 operation
- Lithium batteries available

### Connection

- Easy and universal coupling options
- Lockable couplings to keep loads secure
- Variety of coupling options available



# Dimensions

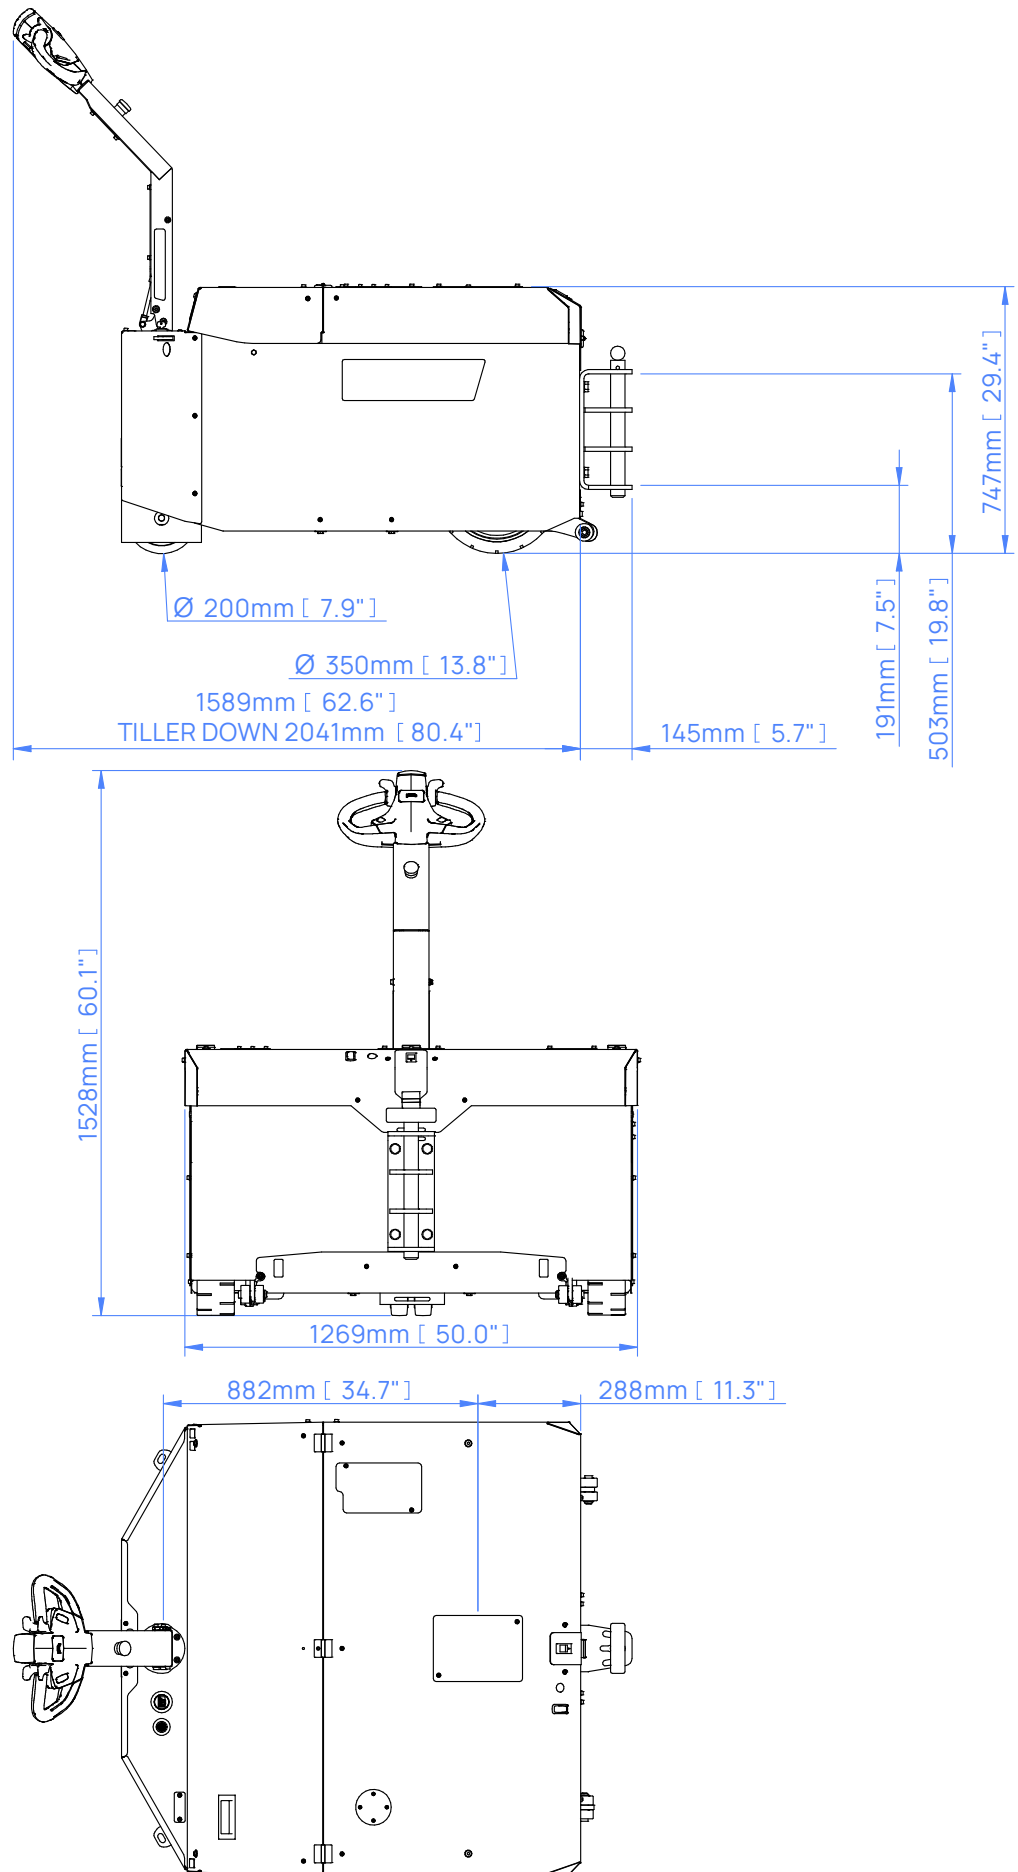


# Slope Performance

The force required to move a load is based on load weight, slope angle and floor condition. Movement on a slope increases the force required to safely start, stop and move the load.

If your application involves moving a load up or down a slope, speak to our team who will be happy to advise on which machine will meet your requirements.



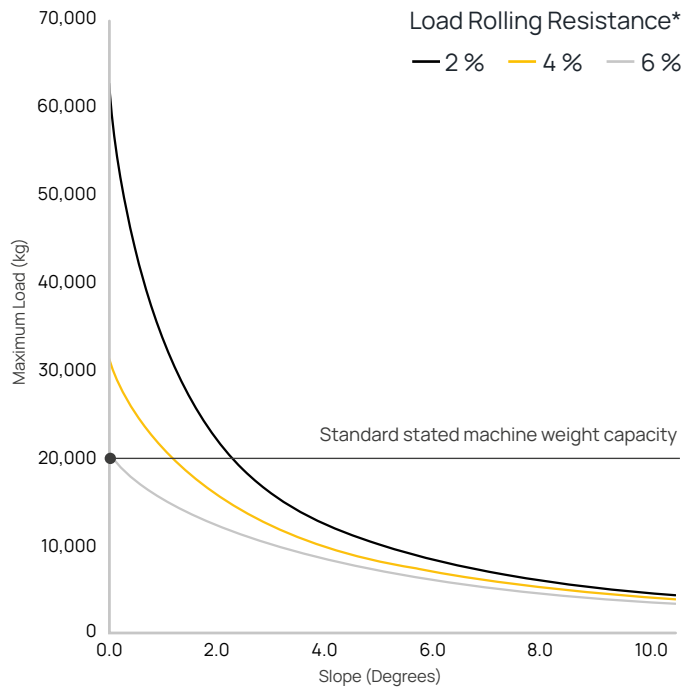




\* Variables that affect rolling resistance include the quality of floor/terrain and the type/condition/quality of castor wheels.








## In Application: MasterTow

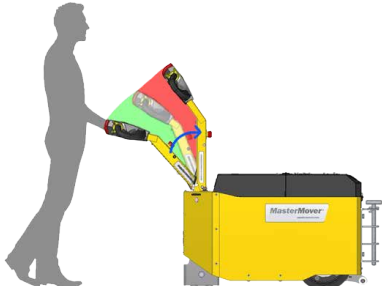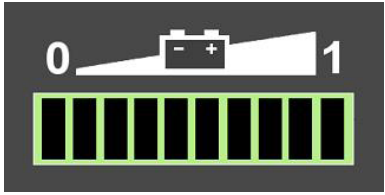




# Machine Safety Features

Emergency Stop Button	Anti-Crush Button	Automatic Parking Brake
		
Warning Horn	Automatic Cut Off	Battery Discharge Indicator
		
Key Switch		
		
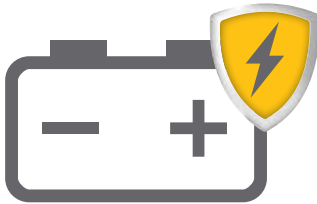
# Machine Options

<p>AGM Battery Z89-00300</p>	<p>Flashing Light &amp; Motion Beeper Z89-00500</p>	<p>Two Speed Selector Switch Z89-00505</p>
		
<p>Machine Crawl Coupling Assist Z89-00501</p>	<p>Battery Protection System Z89-00506</p>	
		

<p>Remote Control</p>	<p>Z89-00504</p>	
	<p>Allow your operator to take up the ideal vantage point and step away from the load itself, with remote control operation.</p> <p>Offering precise and controlled movement, the handset also features audible horn and emergency stop functions for added safety.</p>	
<p>Wireless Autosteer</p>	<p>Z89-00507</p>	
	<p>Combining the power of remote control operation and line follow navigation, Wireless AutoSteer means the electric tug follows a predefined route marked out by a line on the floor, with the operator controlling speed.</p> <p>A great option for tight spaces and when movement should follow the same route, every time. The machine can still be used through standard manual operation when required.</p>	
<p>AGV Line Follow</p>	<p>Z89-00508</p>	
	<p>Benefit from autonomous operation, and remove the need for operators to move loads. Your electric tug will autonomously travel between locations, using a line on the floor for navigation.</p> <p>Barcodes can additionally be used to change machine behaviours, such as to speed up, slow down or stop the machine. Scanners and safety systems identify risks and take appropriate action, restarting movement when a hazard is removed. The machine can still be used through standard manual operation when required.</p>	

# Couplings

Pin Coupling  
Z89-00600 male



Tow Ball Coupling  
Z89-00601 male



Tow Arm Coupling  
Z89-00602 male



No Coupling Z89-00604

## Custom Engineering

We understand that every application is different. Whether it's a custom coupling to connect to your load, modifying our electric tugs to work in a challenging environment, or designing an entirely new solution for your application, our Customer Engineering team are here to help.

For more information on our custom engineering capabilities, please visit: [mastermover.com/custom-solutions](https://mastermover.com/custom-solutions)  
If you'd like to discuss your requirements, speak to your sales representative or email: [sales@mastermover.com](mailto:sales@mastermover.com)

# Technical Specification

Machine	
Product code	Z89-00100
Maximum load (on castors   on rails)	20,000 kg   80,000 kg
Maximum force (push   pull)	7,845 N   11,768 N
Machine weight	1,711 kg
Battery weight (standard)	215 kg
Combined machine & battery weight (standard)	1,926 kg
Drive type	Electric
Braking	Regenerative
Parking brake	Electromagnetic
Drive wheel type	Solid Rubber
Castor wheel type	Non Marking Vulcanized Elastic
Drive wheel diameter	350 mm
Point loading	Drive Wheel 0.080 (kg/mm <sup>2</sup> ) 0.74 [N/mm <sup>2</sup> ] Castor 0.083 (kg/mm <sup>2</sup> ) 0.81 [N/mm <sup>2</sup> ]
Drive motor power	2 x 2 kW
Controller type	AC
Standard machine speed	2 KPH
Hare mode speed (With two speed selector switch)	3 KPH
Tortoise mode speed (With two speed selector switch)	1.2 KPH
Maximum slope	8°
Voltage	24 v
Noise level	Motor ≤80 dBA   Flashing light ≤85 dBA   Horn ≤112 dBA
Metal work finish	Powder coat paint & zinc plated
IP rating	IP44
AGM Battery	
Product code	Z89-00300
Battery pack capacity	234 Ah
Maximum distance per charge*	5.9 km
Charge time (External   Internal charger)	8 hrs 30 mins   8 hrs 30 mins
External Charger	
Product code	Z89-00400
Input voltage	85 - 265 v
Hertz	50 - 60 Hz
Amps	30 A
Phase (single, three)	Single
IP Rating	IP30
Internal Charger	
Product code	Z89-00401
Input voltage	85 - 265 v



# Technical Specification

Hertz	50 - 60 Hz
Amps	30 A
Phase (single, three)	Single
IP rating	IP30
<b>Lithium Battery</b>	
Product code	Z89-00302
Battery pack capacity	180 Ah
Maximum distance per charge*	4.5 km
Charge time (External charger)	4 hrs 30 mins
<b>External Charging</b>	
Product code	Z89-00402
Input voltage	85 - 265 v
Hertz	50 - 60 Hz
Amps	40 A
Phase (single, three)	Single
IP rating	IP30
<b>Coupling</b>	
Pin Coupling (male)	Optional
Tow Ball Coupling (male)	Optional
Tow Arm Coupling (male)	Optional
No Coupling	Optional
<b>Safety</b>	
Key Switch	Standard
Emergency Stop	Standard
Battery Discharge Indicator	Standard
Anti-Crush Button	Standard
Warning Horn	Standard
Automatic Cut Off (as tiller arm returns to vertical)	Standard
Automatic Parking Brake	Standard
Integrated Lift Points	Standard
Integrated Tie-Down Points	Standard
<b>Options</b>	
Additional AGM Battery	Optional
Flashing Safety Light and Motion Bleeper	Optional
Machine Crawl Coupling Assist	Optional
Two Speed Selector Switch	Optional
Battery Protection System	Optional
Remote Control	Optional
Wireless Autosteer	Optional
AGV Line Follow	Optional

**MasterMover®**

mastermover.com

© Copyright 2023

UK  
CE ISO 9001 ISO 45001