

MasterMover®

MT1200+

Battery powered electric tug



MT1200+



Overview

The MasterTug range delivers unrivalled manoeuvrability when moving heavy-wheeled loads. Utilising a unique weight transfer principle, the MasterTug range can move heavy weights whilst retaining an incredibly compact machine footprint.

The design makes the MasterTug range perfect for working in confined spaces and facilitating precise movements.

With ergonomic controls, lightweight steering and an intuitive design, MasterTug takes the strain and empowers an operator to move heavy loads with complete control. A secure coupling system maximises load security and performance, guaranteeing total peace of mind.

The powerful performance of the MasterTug allows operators to push, pull and steer loads inside, outside and on slopes with complete control.

Key Features

Safety

- Audible horn, flashing safety light, emergency stop button and anti-crush button
- Speed control with an optional two-speed selector switch for maximum control
- Complete load security

Performance


- Powerful weight-moving capabilities through weight transfer
- Start, move and stop movement on slopes
- Optimised hydraulics guarantee a smooth connection and movement

Power




- AC motor optimises speed and power
- Slide out, interchangeable batteries deliver 24/7 performance
- Optional Battery Protection System maximises longevity

Connection

- Secure coupling system delivers controlled movement of loads
- Unique mast design enables operators to connect to loads at different heights
- CombiCoupling, BoxCoupling and custom coupling options available

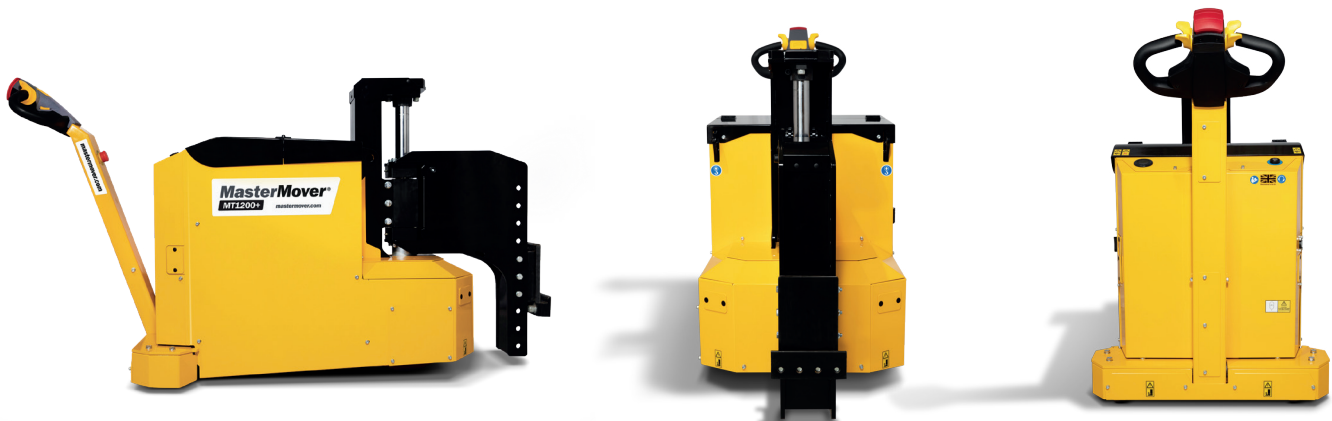


Dimensions

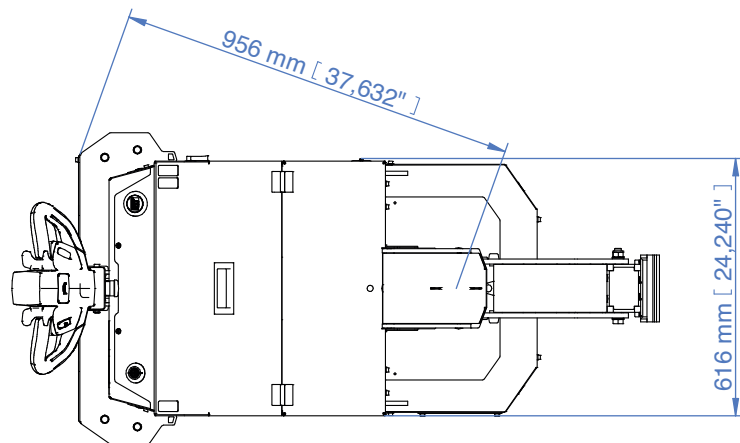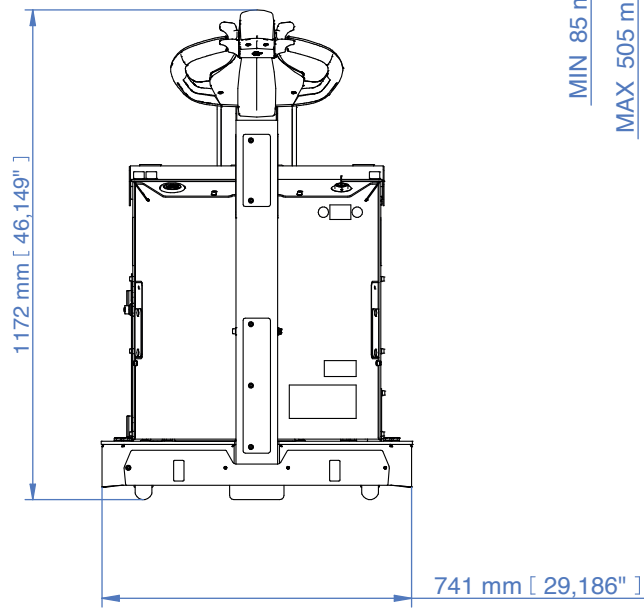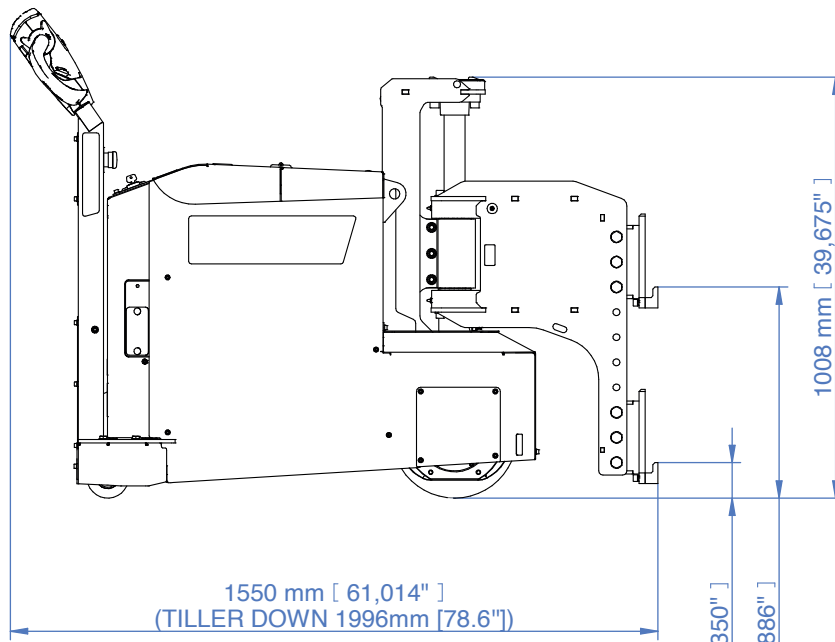

Slope Performance

The force required to move a load is based on load weight, slope angle and floor condition. Movement on a slope increases the force required to safely start, stop and move the load.

If your application involves moving a load up or down a slope, speak to our team who will be happy to advise on which machine will meet your requirements.

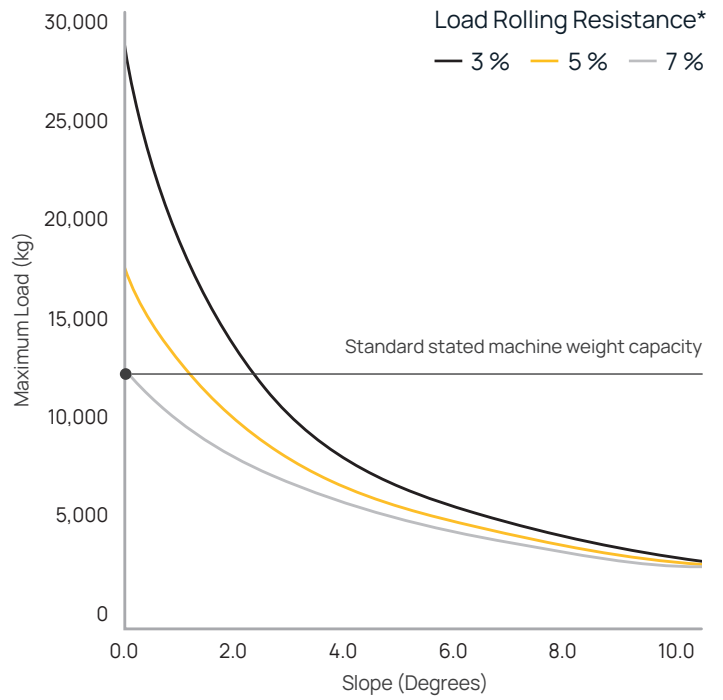









* Variables that affect rolling resistance include the quality of floor/terrain and the type/condition/quality of castor wheels.

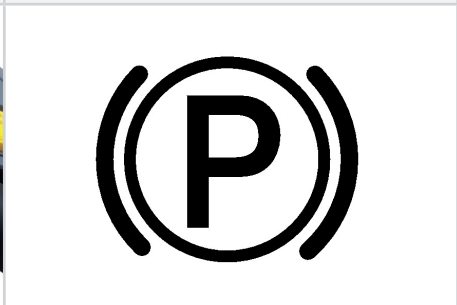


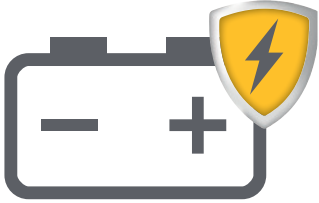

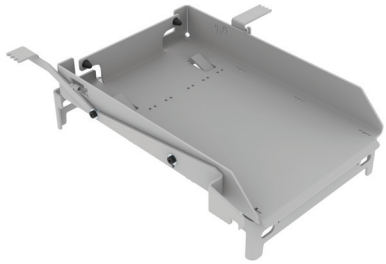
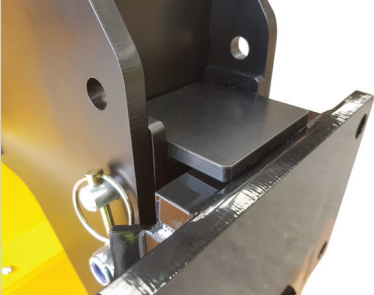

In Application: MasterTug



Standard Safety Features

Emergency Stop Button	Anti-Crush Button	Automatic Parking Brake
		
Warning Horn	Automatic Cut Off	Floating Castor Guard
		
Battery Discharge Indicator	Key Switch	
		


Machine Options

<p>Additional AGM Battery Z64-00300</p>	<p>Two Speed Selector Switch Z64-00501</p>	<p>Flashing Light & Motion Beeper Z64-00500</p>
		
<p>Battery Protection System Z64-00504</p>	<p>Battery Transportation Trolley Z64-00506</p>	<p>Battery Transportation Stand Z64-00505</p>
		
<p>CombiLock Z64-00502</p>	<p>Remote Control Z64-00507</p>	
		

Couplings



CombiCoupling

Z64-00600 male | Z64-00700 female

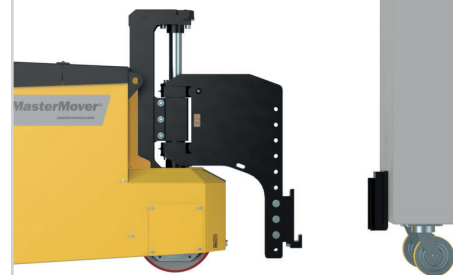

BoxCoupling

Z64-00601 male | Z64-00701 female

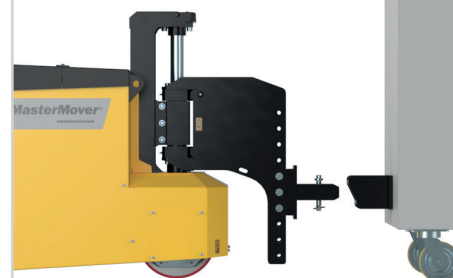

Custom Engineering

We understand that every application is different. Whether it's a custom coupling to connect to your load, modifying our electric tugs to work in a challenging environment, or designing an entirely new solution for your application, our Customer Engineering team are here to help.

For more information on our custom engineering capabilities, please visit: mastermover.com/custom-solutions
If you'd like to discuss your requirements, speak to your sales representative or email: sales@mastermover.com

Technical Specification

Machine	
Product code	Z64-00102
Maximum load (on castors on rails)	12,000 kg 48,000 kg
Maximum (push force pull force)	8,238 N 8,238 N
Machine weight	348 kg
Battery weight (standard)	143 kg
Combined machine & battery weight (standard)	491 kg
Drive type	Electric
Braking	Regenerative
Parking brake	Electromagnetic
Drive wheel type	Non-Marking Polyurethane
Castor wheel type	Non-Marking Polyurethane
Drive wheel diameter	300 mm
Point loading	0.5 (kg/mm ²) 4.90 [N/mm ²]
Drive motor power	2 kW
Controller type	AC
Standard machine speed (no speed selector switch)	2 KPH
Hare mode speed (with two speed selector switch)	3 KPH
Tortoise mode speed (with two speed selector switch)	1.2 KPH
Maximum slope	8°
Voltage	24 v
Noise level	Motor ≤80 dBA Flashing light ≤85 dBA Horn ≤112 dBA
Metal work finish	Powder coat paint & zinc plated
IP rating	IP44
Hydraulic Specification	
Maximum Lift Force at the Coupling	2,161 kg
AGM Battery	
Product code	Z64-00300
Battery pack capacity	179 Ah
Maximum distance per charge*	8 km
Charge time (external charger)	6 hrs
Charge time (internal charger)	9 hrs
External Charger	
Product code	Z64-00400
Input voltage	85 - 265 v
Hertz	50 - 60 Hz
Amps	30 A
Phase (single, three)	Single
IP Rating	IP30

Technical Specification

Internal Charging	
Product code	Z64-00401
Input voltage	85 - 265 v
Hertz	50 - 60 Hz
Amps	20 A
Phase (single, three)	Single
IP rating	IP30
Lithium Battery	
Product code	Z64-00302
Battery pack capacity	120 Ah
Maximum distance per charge*	5.4 km
Charge time (external charger)	3 hrs
External Charging	
Product code	Z64-00402
Input voltage	85 - 265 v
Hertz	50 - 60 Hz
Amps	40 A
Phase (single, three)	Single
IP rating	IP30
Couplings	
CombiCoupling (male female)	Optional
BoxCoupling (male female)	Optional
Safety	
Key Switch	Standard
Emergency Stop Button	Standard
Battery Discharge Indicator	Standard
Anti-Crush Button	Standard
Warning Horn	Standard
Automatic Cut Off (as tiller arm returns to vertical)	Standard
Automatic Parking Brake	Standard
Integrated Lifting and Tie-Down Points	Standard
Floating Castor Guard	Standard
Options	
Additional AGM Battery	Optional
Flashing Safety Light and Motion Bleeper	Optional
Two Speed Selector Switch	Optional
CombiLock	Optional
Battery Protection System	Optional
Battery Transportation Stand	Optional

Technical Specification

Battery Transportation Trolley	Optional
Remote Control	Optional

MasterMover®

mastermover.com

© Copyright 2023

UK
CA

CE

ISO 9001

ISO 45001